


Product Data Sheet InterAx™ NXL™ Geogrid


Tensor reserves the right to change its product specifications at any time. It is the responsibility of the person specifying the use of this product and of the purchaser to ensure that product specifications relied upon for design or procurement purposes are current and that the product is suitable for its intended use in each instance.

General

- The geogrid is manufactured from a coextruded, composite polymer sheet, which is then punched and oriented. The resulting structure consists of continuous and non-continuous ribs forming three aperture geometries (hexagon, trapezoid, and triangle) and an unimpeded suspended hexagon.

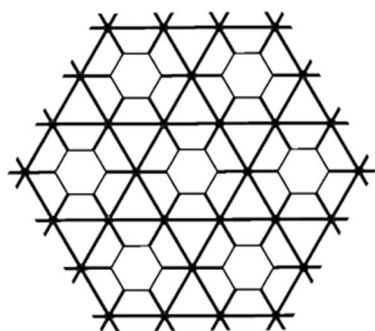

Tensor NXL Geogrid
Plan View

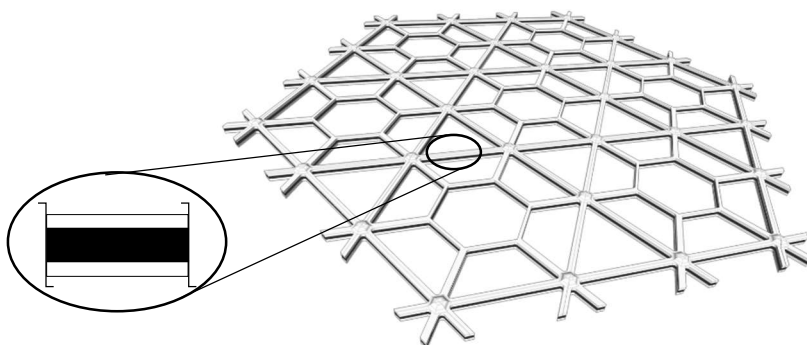

Tensor NXL Geogrid
Perspective View

- The following properties are intended for product identification:

Identification Properties ⁽¹⁾	General
▪ Aperture Shapes	Hexagonal, Trapezoidal, & Triangular
▪ Structure	Coextruded & Integrally Formed
▪ Rib Shape	Rectangular
▪ Continuous Parallel Rib Pitch ⁽²⁾ , mm (in)	120 (4.7)
▪ Rib Aspect Ratio ⁽³⁾	> 1.0
▪ Node Thickness ⁽²⁾ , mm (in)	4.5 (0.18)
▪ Color Identification	White / Black / White

Dimensions and Delivery

The geogrid shall be delivered to the jobsite in roll form with each roll individually identified. Rolls are shipped with nominal measurements.

Notes

- Unless indicated otherwise, values are minimum average roll values in accordance with ASTM D4759-02
- Nominal dimensions
- Ratio of the mid-rib to the mid-rib width