


## Product Data Sheet


### Tensor<sup>®</sup> InterAx<sup>™</sup> NX750-G Geocomposite

#### General

The Tensor InterAx geocomposites are manufactured from a coextruded, composite polymer sheet, which is then punched and oriented. The resulting geogrid structure consists of continuous and non-continuous ribs forming three aperture geometries (hexagon, trapezoid, and triangle) and an unimpeded suspended hexagon. A non-woven geotextile is then bonded to the geogrid to form a geocomposite.

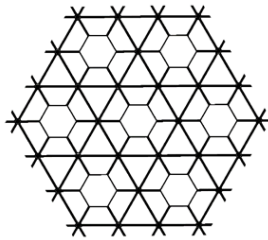

**Tensor NX750-G Geocomposite  
Plan View**

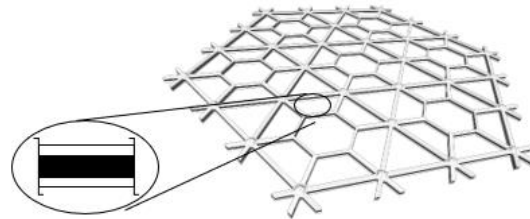

**Tensor NX750-G Geocomposite  
Perspective View**

The Tensor InterAx geocomposite uses the distinct stabilisation function as defined in ISO 10318 to minimise the movements of unbound granular material in road, rail and other trafficked areas. Extensive performance testing has demonstrated that when included as a component of a mechanically stabilised layer, the mechanical behaviour of the unbound layer is improved. The characteristics below allow product identification only.

Identification Properties <sup>(1)</sup>	General
<b>Geogrid component</b>	
▪ Aperture shapes	Hexagonal, Trapezoidal, & Triangular
▪ Structure	Coextruded & Integrally Formed
▪ Rib shape	Rectangular
▪ Continuous parallel rib pitch, mm	80
▪ Rib aspect ratio <sup>(2)</sup>	> 1.0
▪ Node thickness, mm	3.5mm
▪ Colour identification	White / Black / White
<b>Geotextile component</b>	
▪ Static puncture resistance <sup>(3)</sup>	1.30kN (Tolerance -0.5kN)
▪ Dynamic perforation resistance <sup>(4)</sup>	35mm (Tolerance +10mm)
▪ Characteristic opening size <sup>(5)</sup>	140µm (Tolerance ±60µm)
▪ Water permeability normal to the plane (Velocity Index) <sup>(6)</sup>	0.110m/s (Tolerance -0.05m/s)

#### Dimensions and delivery

The geocomposite shall be delivered in roll form with each roll individually identified as Tensor NX750-G geocomposite. Roll dimensions are typically 50m long by 3.8m wide.

## Notes

1. Unless noted otherwise, the values shown are nominal
2. Ratio of the mid-rib depth to the mid-rib width
3. Measured in accordance with EN ISO 12236
4. Measured in accordance with EN ISO 13433
5. Measured in accordance with EN ISO 12956
6. Measured in accordance with EN ISO 11058

The information in this document supersedes any previous bulletins in relation to this subject matter and is supplied by Tensar International Limited free of charge for general information purposes only. This document does not form part of any contract or intended contract. Tensar International Limited excludes to the fullest extent lawfully permitted any and all liability whatsoever for any loss or damage howsoever arising out of the use of and reliance upon this information. It is your sole responsibility, and you must assume all risk and liability for the final determination as to the suitability of any Tensar International Limited product and/or design for the use and in the manner contemplated by you in connection with a particular project.



Cert – QH50288  
Applicable to Tensar International  
and Tensar Manufacturing Ltd



Cert – EMS5463  
Applicable to Tensar Manufacturing Ltd

**Registered Office**  
Units 2-4 Cunningham Court, Shadsworth Business Park Blackburn,  
Lancashire, BB1 2QX, UK

**Tensar is a Division of CMC**  
**Tensar, InterAx, H-Series and TriAx are registered trademarks**  
**Copyright © Tensar International Limited 2024**